
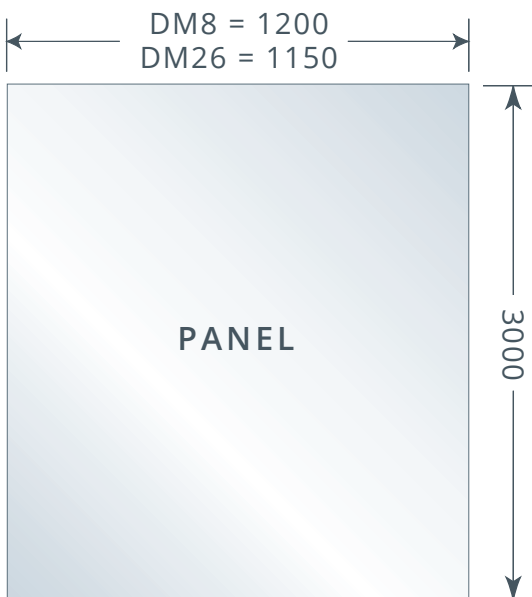


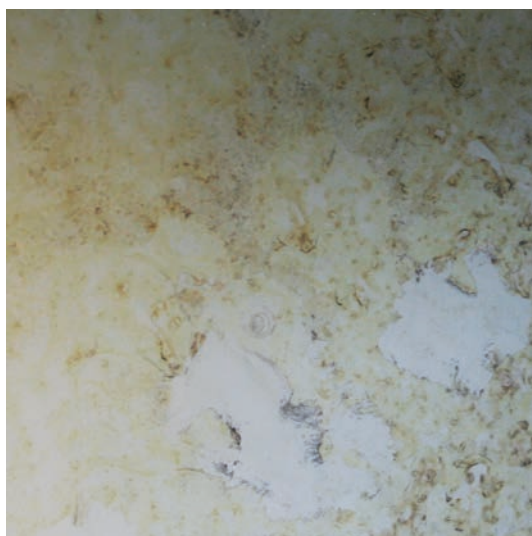

PRODUCT REFERENCE	DIAMOND MIRROR® 8 ANTIQUE SILVER	DIAMOND MIRROR® 26 ANTIQUE SILVER
FACE MATERIAL	4mm silvered glass with antique distressed effect	4mm silvered glass with antique distressed effect
CORE MATERIAL	N/A	Impact resistant layer from 2mm expanded polyether polymer
BACK MATERIAL	Impact resistant layer from 4mm expanded polyether polymer	20mm (nominal) thick lightweight composite board obviating the need for a smooth continuous substrate
NOMINAL THICKNESS	8mm	26mm
BACKGROUND	Smooth continuous substrate	Block & brickwork, timber/metal studs
EDGE TREATMENT	Polished all round	Polished all round
WEIGHT	10kg per m ² (nominal)	11.4kg per m ² (nominal)
MAXIMUM PANEL SIZE	3000mm x 1200mm (subject to variation)	3000mm x 1150mm (subject to variation)
SAFETY	Shatterproof: Impact resistant to BS EN 12600 Fire: BS 476 Part 6 & 7 Class 1. Complies with requirements for Class 0. (see Test Data Summary Sheet)	Shatterproof: Impact resistant to BS 6206 Fire: BS 476 Part 6 & 7 Class 1. Complies with requirements for Class 0. (see Test Data Summary Sheet)
JOINT TREATMENT	Arissed butt vertical joint, bright polished anodized aluminium 'H' section trims to horizontal joints if required - refer to Product Manual or Chelsea Artisans for recommendations.	Arissed butt vertical joint, bright polished anodized aluminium 'H' section trims to horizontal joints if required - refer to Product Manual or Chelsea Artisans for recommendations.
FIXING METHOD	Adhesive and/or bright polished anodized aluminium 'J' section trims - refer to the Product Manual, Advice Manual or Chelsea Artisans for recommendations.	Adhesive and/or bright polished anodized aluminium 'J' section trims - refer to the Product Manual, Advice Manual or Chelsea Artisans for recommendations.
ACCESSORIES	Purpose made bright polished anodized aluminium 'J' section trims to perimeter and 'H' section trims to horizontal joints.	Purpose made bright polished anodized aluminium 'J' section trims to perimeter and 'H' section trims to horizontal joints.
PROCESSING OPTIONS	Factory cut outs to accommodate control panels, ironmongery etc. Site cutting possible.	Factory cut outs to accommodate control panels, ironmongery etc. Site cutting possible.
COLOURS	Please see Diamond Mirror® Colour Guide for options.	Please see Diamond Mirror® Colour Guide for options.